

FORD RANGER MONSTER TRUCK

Model: DK-MT550

Age Range: 37-96 Month

Maximum Weight: 35 KGS

Execution Standard:

GB6675&GB19865 ☐

EN71&EN62115 ☐



AGES 3+



Pictures are for reference only, please adhere to the original products as standard



Specifications

Item	Specifications
Battery	12V10AH*1 / 12V7AH*2
Motor	35W
Available Ages	Children from 37-96 month
Maximum Weight	35KGS
Size	134*103*95cm
Speed	3-5km/h
Charging Time	8-12hours
Remote Control Batteries	2PCS of AAA Batteries
Charger	Input:220V Output:DC12v1000MA

Parts list


1	Body	1	15	A rear axle	1
2	Steering support	1	16	Front iron parts	1
3	Tyre	4	17	Pedal	4
4	Rim	4	18	Floor	1
5	Chair	1	19	Screw bag	1
6	Front windshield	1	20	M10 nut	6
7	Steering wheel	1	21	φ17 Gaskets	4
8	The hood	1	22	Tool	1
9	Searchlight	1			
10	Handrail	2			
11	Rearview mirror	2			
12	Remote control	1			
13	Charger	1			
14	Key	2			


Decomposition diagram



Install steering bracket




 **WARNING:** Products must be assembled by adults

 Installation tools (please bring your own)
nipple pliers, screwdrivers

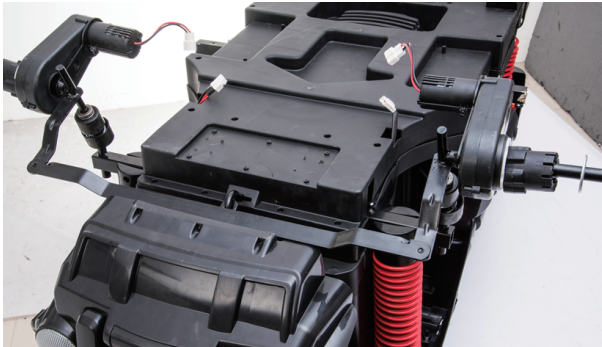

1. Open the box and get all spare parts out.
2. Turn over the whole car, make the bottom up.
3. Front bracket of changing direction assemble process:
Take out the front bracket of changing direction, and put the deflector guide into the neck of bracket. Loose two M10 screw, and install onto the main body ironware.

Install steering bracket

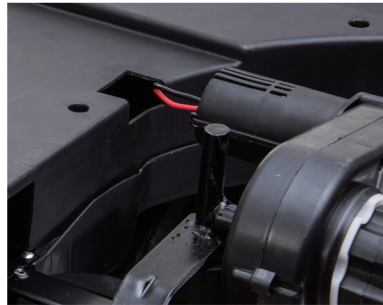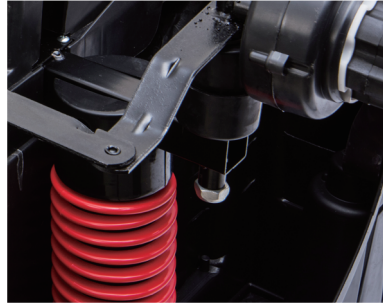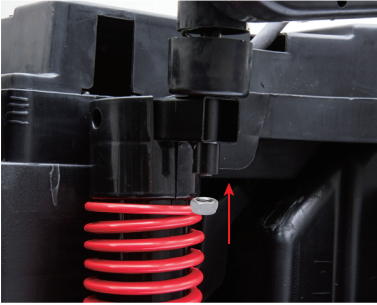


4. Screw on the M10 screw. (Attention: Press the ironware slightly and make the thread show up.)
5. Connect driving motors from left and right, and hide the connectors under the bottom.
6. Cover the head of deflector guide with diameter 10.5MM gasket, and use the cotter pin to fix.

Install front bottom plate and front iron fixing plate



1. Install front bottom panel

Connect car front and front bottom panel with 9 PCS of M4*12 thumb head screw.

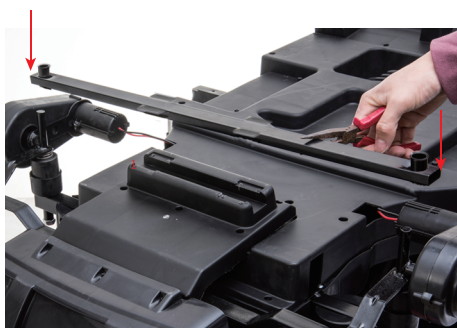

2. Install front ironware plate:

Insert the axle into the front bracket and use 8 PCS of thumb head screw to fix. It is better to wipe some lubricant.

Install front wheel, left and right pedals



1. Install front wheels

Please check carefully front left and right wheel, and make sure the plum blossom and driving motor are matching well.


2. After assembling the front wheel, put the cotter pin of 17mm and use M10 screw to fix. Attention: Need some gap.



3. Install pedal from both sides:

The pedal are divide into left, right, upper and lower parts. Insert the upper part of pedal into the upper board and then cover with lower parts, and then use M4*12 thumb head screws to fix. The same for left and right.

Install back axle



1. Please find the back holes and insert the back axle into the car body, please make sure well shaped from left and right sides. Assemble back driving motors and make sure left and right, and then hide the connectors into the bottom board.



2. Install back wheels:

Please also note that there are left back wheel and right back wheel, and make sure the plum blossom match well with the plum blossom of driving motors.

Install windshield, reflector, hood



1. Install front window shield:

Please find the proper position and install the front window shield, and then use 2 PCS of M4*12 thumb head screw to fix.



2. Install rear view mirrors:


Please find proper position and install them.



3. Install front hood:

Insert the front hood into the front window shield and make sure they are assembled in proper position.

Install steering wheel and armrest

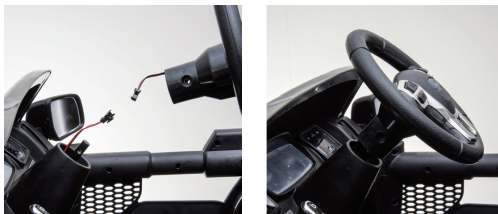

1. Install steering wheel:

Take out of the steering wheel and loose the screws, and then connect the power of button , and then assemble to the steering rod.




2. Install handrail:

Please press the handrail to the proper position.

(Attention: make the screw inside in order to be more good looking).

Installation of diversion rack and main power supply connection

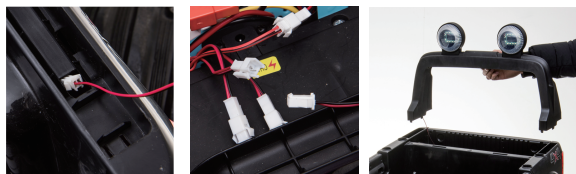

1. Install searching lights:

Connect the power first under the seat, and then install the searching lights.



2. Connecting the main power:


Connect the main power under the seat.

Install seat



Firstly, insert the rotary knobs of the seat into the car body, and then screw them. (Referring to the photo above.

To avoid fuse cut off the power:



- 1.Max:35kgs, overload is forbidden
- 2.Do not drag any item behind this product
- 3.Do not allow water or other liquids dip the electrical parts.
4. Do not change the line system by yourself.

Please take the seat away when the car needs to be charged and the battery is under the seat. The battery is removable so that it can be charged either inside the car or outside the car.




Charger



Two holes socket.

Player usage

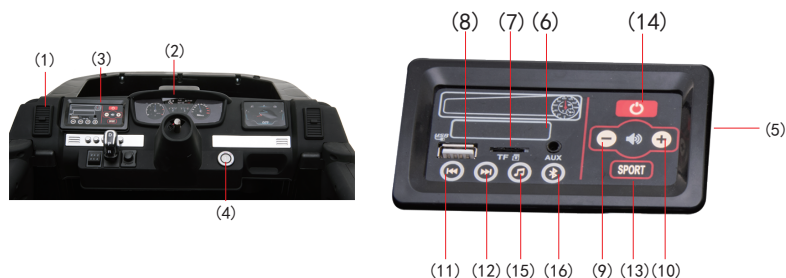

1. Imitation of air conditioner
2. Dashboard
3. multi-function display
4. Key switch
5. MP3
6. Display
7. TF socket
8. USB socket

9. Volume decrease
10. Volume increase
11. The last song
12. The next
13. Cancel
14. Display switch
15. Music
16. Bluetooth



1. Press the music button on the steering wheel for horn or music.
 2. Plug in your MP3 device to play your own music through the car.
- Please note the steering wheel sounds will not work when the MP3 device is connected.
- Please note the steering wheel sounds wheel not work when the MP3 lead is connected.

Operation Guide

For first time use or after replacing the battery, select not to pair. The car will power on after turning the ignition key.

If you choose to pair the remote control with the car, please follow the instructions below.

- Step1. Insert two AAA 1.5V batteries into the battery compartment of the remote control. Ensure the battery polarity is matched correctly. If the frequency lights flashes then the battery is correctly installed.
- Step 2: Hold the Car Select button for 2-3 seconds.
- Step 3: Turn on the ignition key to turn on the car.

*Manufactured according to FCC certification testing and ECM credential.

*This remote is to be used by adult only.



Operation Guide

Battery polarity cannot be reversed, please ensure the red wire is connected to the red battery terminal and the black wire is connected to the black battery terminal

- Press the power switch to OFF position to turn the power off.
 - Open the seat, connect the battery plug, red to red.
 - Never drain battery completely or to a crawling speed, recharge the battery when a decrease in speed and power is noticed. Warranty will be voided if misuse has occurred.
 - Battery charging must be done by adults only. Never allow children to charge the battery. A child could be injured by the electricity involved in charging the battery.
 - Please don't connect the wires to a short circuit. The charger and the battery are not a toy. Do not allow children to play with the charger and the battery. Only operate the battery and charger specified according to the manual instructions.
 - Please do not open the battery and the charger.
 - To maintain safety of vehicle, always secure the battery with the bracket.
 - The battery must be handled and operated by adults only: the battery is heavy and contains sulfuric acid (electrolyte). Dropping the battery could result in serious injury
 - Before charging the battery check for wear or damage to the battery, charger, the connectors and other parts. If any damage found, the charger should be repaired or replaced immediately. Do not use a damaged charger.
 - It is normal for the adaptor to feel warm during charging, but if the charger feels too hot, stop charging immediately and check the battery and adaptor. When charging please turn off the power switch. Please charge the battery for 8-10 hours after first use. Subsequent charges should be 6-8 hours but not exceeding 10 hours. If do not use the car for a long time, please charge at least once a month to keep the battery cells active.
1. Plug the charger into the charging socket.
 2. Plug the other end of the charger into your wall socket.
- Batteries are perishable items that are subject to under and over charging. Please observe the charging time.

TROUBLESHOOTING


Problem: The car does not move.

Answer 1: The battery is low, please charge for 6-8 hours but not exceeding 10 hours.

Charge at least once a month to keep the battery cells active.

Answer 2: The battery is low. Please charge the battery for 6-8 hours but not exceeding 10 hours.

Charge at least once a month to keep battery cells active.



To avoid short fuse or power cut off:

1. Do not overload the product. Max load is 30Kg.
2. Do not drag any item behind this product.
3. Do not allow water or any liquid into electric parts.
4. Do not change wire system without a professional.

■ TROUBLESHOOTING

Problem: The car only runs for a short time

Answer 1: The battery is low, please charge for 6-8 hours but not exceeding 10 hours.

Charge at least once a month to keep the battery cells active.

Answer 2: The battery may need to be replaced depending on its charging history and age.

Problem: The sound does not work.

Please ensure the volume is turned up and the MP3 line is not connected. Sounds from steering wheel will not work when MP3 is plugged in.

Problem: Charger overheating

It is normal for battery and charger to be slightly warm during charging.

If the charger feel excessively hot, please check for a current overload or battery short circuit.

SAFETY PRECAUTIONS

01. While driving , adult supervision is required all the time
02. Always wear a helmet when driving
03. Please don't drive near road or on the footpath.
04. It is not recommended to drive the vehicle on wet surface or on slope greater than 15-degree.
05. It is recommended to drive this vehicle on smooth surface only.
06. Please don't drive this vehicle outdoors when it is raining.
07. Make sure that the vehicle stop completely before changing direction from forward to reverse
08. Please don't allow children to operate the charger or play with the battery
09. Clean the vehicle with a dry cloth only.
10. Please follow the correct weight and age limits allowed to drive this vehicle.
11. It is prohibited to change the circuit or add other electric parts.
12. Adults must teach their children about safe driving procedures.
13. Please turn the power off when not in use.
14. Check the seat to ensure it has been fitted and secured with a bolt before driving.
15. Inspect all wires and connection of the vehicle periodically.
16. Charging the battery should only be done by adults.
17. Charging plug is located underneath the seat.
18. In order to avoid accidents, please ensure the vehicle is safe before driving.
19. Please don't let children touch the wheels or be near them when the car is moving.
20. Please mind fingers when opening and closing doors.

Warning-When replacing a replaceable battery,first open the lid and take out the old battery.Put in the new battery,pay attention to the positive and negative poles,cover the lid.



WARNING!

For safety reasons,

- *please use this vehicle under adult guidance and supervision.
- *do not use this product on main roads, slopes, highways or other dangerous places.
- *children must wear shoes and protective gears when operating the vehicle.
- *children should be seated with the seat belt fasten when driving.
- *only load a maximum of 30Kg on the vehicle.
- *only children aged 37 - 96 months should be allowed on this vehicle.
- *use this toy strictly according to safety manual.
- *please check the tires, breaks, steering wheels, seats and seat belts before operating vehicle.
- *this toy vehicle should be used with caution and requires skill to avoid fall or collision with third parties.

Pictures are for reference only, please adhere to the original products as standard